



## EV CHARGING SOLUTION

### DC Charger / DC City Charger

#### Features

- 50kW / 100kW simultaneous charging
- Dynamic load distribution optimizes charging service
- RFID, credit card and ISO 15118 user identification
- OCPP and network connectivity enables system integration
- Modular design ensures high availability
- IP55 and small footprint provides high adaptability
- 94% power efficiency for energy-saving



Highway  
Service



Parking



Service  
Station



Commercial  
Building



Fleet



# Speed up Urban Life with EV Fast Charging


DC City Charger is an ideal solution for high efficiency urban charging service. It supports simultaneous charging output and load distribution to optimize utilization rate of the charging site. DC City Charger is compatible to OCPP which allows further backend system integration like user management, remote control and energy management.



## Feature Highlights



## Application Scenario

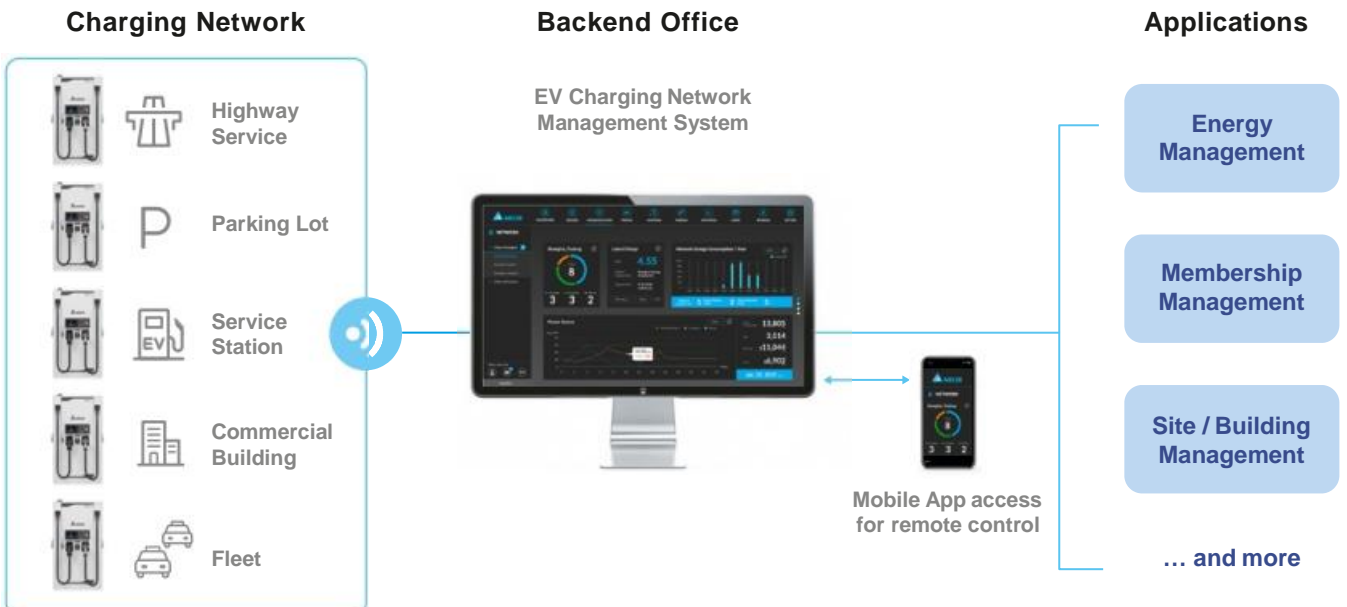

# Specifications

Part Number	EVHU104-	
Power Input	Single Output	Dual Outputs
Input Rating	480 Vac, 3-Phase, 50 / 60 Hz, L1, L2, L3, N, PE L1, L2, L3, N, PE	
Power Factor	0.99 at nominal output	
Efficiency	94% at nominal output power	
Power Output		
Output Voltage	50 – 1000 Vdc	
Output Interface	DC output options: CCS1, CHAdeMO	
DC Output Current	200 A max.	
DC Output Power	100 kW max.	
Protection		
Protection	Over current, Under voltage, Over voltage, Surge protection, Short circuit, Over temperature, Ground fault	
User Interface & Control		
Display	7 inch LCD Touch Panel	
Support Language	English (Other languages available upon request)	
Push Buttons	1 Emergency Stop Button	
Charge Options	-	Simultaneous charging and configurable dynamic load sharing
User Authentication	ISO / IEC 14443 A / B Mifare RFID reader	
Communication		
Network Interface	Ethernet, Cellular, WLAN, Bluetooth	
Protocol	OCPP1.5-S, OCPP1.6-J, upgradable to OCPP2.0	
Environmental		
Operating Temperature	Operating from -22 °F to +122 °F (-30 °C to +50 °C), Derating from +122 °F to 140°F (+50 °C to +60 °C)	
Storage Temperature	-40 °F to +176 °F (-40 °C to +80 °C)	
Humidity	< 95% relative humidity, non-condensing	
Altitude	13,000 ft. (4,000 m)	
Mechanical		
Ingress Protection	Type 3R	
Enclosure Protection	IK10 according to IEC 62262	
Cooling	Forced air	
Charging Cable Length	13 ft. (4 m) (Standard) ; 25 ft. (7.5 m) (Optional)	
Dimension (D x H x W) / Weight*	23.2 x 59.1 x 31.5 in. / 772 lb (590 x 1500 x 800 mm / 350 kg)	
Regulation		
Certificate	UL2202, UL 2231 CSA C22.2#107.1:2016 Ed.4, CSA C22.2#281.2 Issued: 2012/09/07 Ed:1	
Installation		
Accessory	Basement	

\* Dimension and weight including 4 m charging connectors, subject to variants.  
Product outlook depends on configuration. Specifications are subject to change without notice.



CALL US TO ORDER TODAY!

**585.533.4051**

500 Canal View Blvd • Suite 100  
Rochester, NY 14623

**Delta Electronics (Americas) Ltd.**

46101 Fremont Boulevard  
Fremont, CA 94538, U.S.A  
TEL: +1 510 668 5100  
E-mail: [evcs.sales@deltaww.com](mailto:evcs.sales@deltaww.com)

[www.deltaww.com/evcs](http://www.deltaww.com/evcs)